

HDR48-ES Rectifier Module




Contents


Description	Page
AC Input	2
DC Output	3
Environmental Requirements	3
Mechanical	4
Compliances	4
Certifications	4

AC Input


Nominal AC Input:	230V
Rated Operating Range:	85 to 275V rms (see product performance curves).
Extended Operating Range:	78 to 300V rms
Frequency Range:	45 to 66Hz
Maximum Input Current:	18A rms
Efficiency:	96.9% >96% (30 to 100% load, Vin=230Vac, Vout=54.5Vdc, 25°C) <i>Values are average and typically within +/- 0.1%</i>
Power Factor:	>0.99 (50 to 100% load) @ 25°C
Total Harmonic Distortion (THD):	<5% (50 to 100% load, rated 230V ac voltage)
Swell Tolerance:	Rectifier shuts down above 305V +/- 5Vac <i>Returns to normal operation when input is within operating range.</i>
Input Over-current Protection:	Fuses (phase and neutral) HRC
AC Fuse Ratings:	25A / 250V

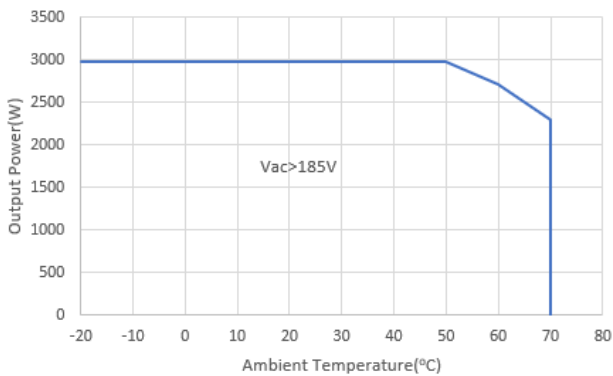


Output Power Derating with Temperature (Vout = 48V)

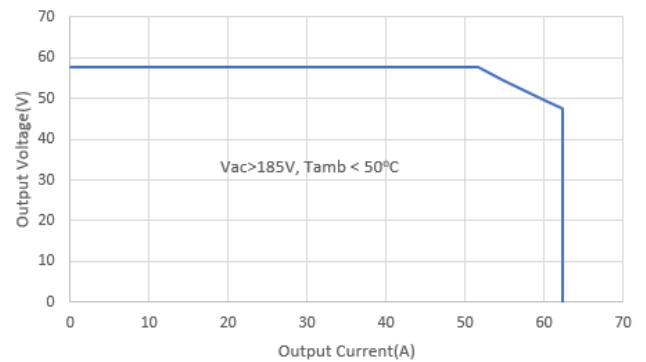

Output Voltage with Output Current

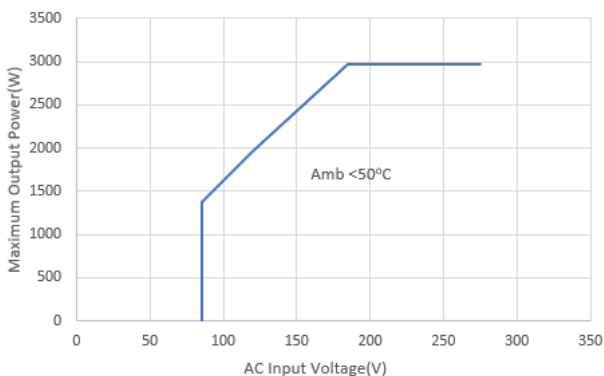

Maximum Output Power with AC Input Voltage

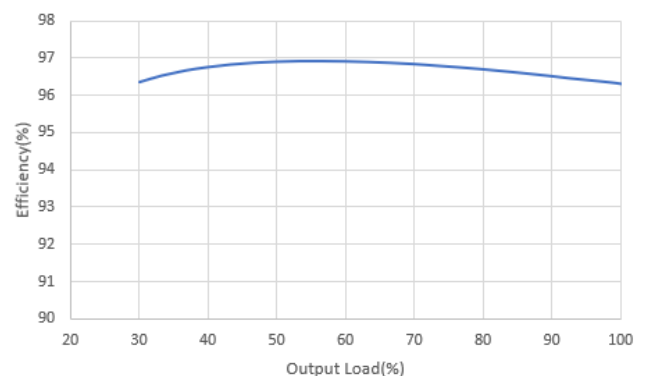

**Rectifier Efficiency with Output Load
(Ambient Temperature 25°C, Vin = 230V, Vout = 54.5V)**

DC Output

Nominal Voltage:	48V
Adjustable Voltage Range - Rated:	43.5 to 58V <i>Constant power output characteristic 50 – 57.5V. Performance criteria met, unless otherwise stated. Load required below 45V</i>
Adjustable Voltage Range - Extended:	57.5 to 58.0V <i>Recommended setting of 57.6V maximum to prevent OVSD triggering at high load and low temperature</i>
Rated Output Power:	3000W @ 185 – 275V ac (230V nominal) 1725W @ 110 – 120V ac (120V nominal)
Preset Accuracy	±0.1V
Line Regulation:	±0.1%
Load Regulation:	±0.7% <i>Constant voltage mode, AVC enabled from system controller.</i>
Load Step Change:	Voltage deviation <10% in <10mS, 10%-90%-10% rated load
Default (Fail-safe) voltages Loss of System Communication: Preset voltage:	Output voltage resets to system preset voltage 54.5 ±0.1V (manufacturer preset)
Hold-up Time:	>10ms <i>At 80% output power and 230V ac the DC output voltage change is 54.5V to 43.5V.</i>
Start-up (soft start) Start up delay: Output ramp slope: (rectifier rated output, % Amps per second)	Adjustable 0 to 600 seconds (factory preset: 2 seconds) Adjustable 1 to 100% per second (factory present 20% per second)
Protection Current Limit: Over Temperature Turndown: Over Voltage Shutdown: Short-circuit:	62.5A Automatic power turndown. See temperature derating graphs. <10ms delay Full short-circuit protection. Output current limited to less than 110% of rated output current. <i>Rectifier will continue normal operation after short-circuit is removed. Non-urgent (Current Limit) alarm generated.</i>
Noise Ripple (<100Hz) Audio Frequency (300 Hz – 3.4 kHz): Wide band (5Hz – 1MHz): Peak to peak (0 – 20 MHz): Discrete frequency (3.4kHz – 150kHz):	<10mV rms (unweighted) <2mV (psophometric) <10mV rms (unweighted) <200mV p-p (unweighted) <5mV rms (1kHz wide selective frequency) <i>Conditions: 25°C, 54.5V output</i>

Environmental Requirements

Ambient Temperature Rated Operating Range: Extended Operating Range:	-10°C to +50°C [14°F to 122°F] -25°C to +70°C [-40°F to 158°F] <i>Output characteristics derate above 50°C and below -10°C [14°F]. Refer to derating graphs.</i>
Humidity Nominal: Range:	50% RH < 95% RH (noncondensing)
Altitude:	< 3000m [9800']

Mechanical

Dimensions H, W, D:	3U (120mm, 4.7"), 1U 42mm (1.7"), 265mm (10.5") overall
Weight:	2.2kg [4.8 lb]
Connector:	PCB Edge
Cooling:	Temperature controlled, variable speed high reliability fan
Front panel LEDs:	
Power on:	Green
Minor alarm:	Amber
Major alarm:	Red

Compliances

Safety:	EN62368-1
EMC – immunity	
Electrostatic discharge:	EN 61000-4-2
Radiated radio frequency:	EN 61000-4-3
Electrical fast transients:	EN 61000-4-4
Surge:	EN 61000-4-5
Conducted radio frequency:	EN 61000-4-6
Dips, interruptions & variations:	EN 61000-4-11
EMC – emissions	
Conducted emissions (AC):	EN 55022 (Class B)
Conducted emissions (DC):	EN 55022 (Class B)
Radiated emissions:	EN 55022 (Class B)
Harmonics:	EN 61000-3-2
Fluctuations and flicker:	EN 61000-3-3

Certifications

Europe, APAC	CE-mark
Americas	FCC

© Eaton Corporation. All Rights Reserved. In the interests of continual product improvement all specifications are subject to change without notice. Performance ratings are valid with all other variables at Nominal. Specifications guaranteed over the rated operating range unless otherwise noted. Eaton, Powerware, Intergy, CellSure, SiteSure, DCTools and PowerManager are trade names, trademarks, and/or service marks of Eaton Corporation or its subsidiaries and affiliates. All other marks are the property of their respective owners.